6P6C RJ-11 Voice Decorex Insert

PRODUCT SPECIFICATION

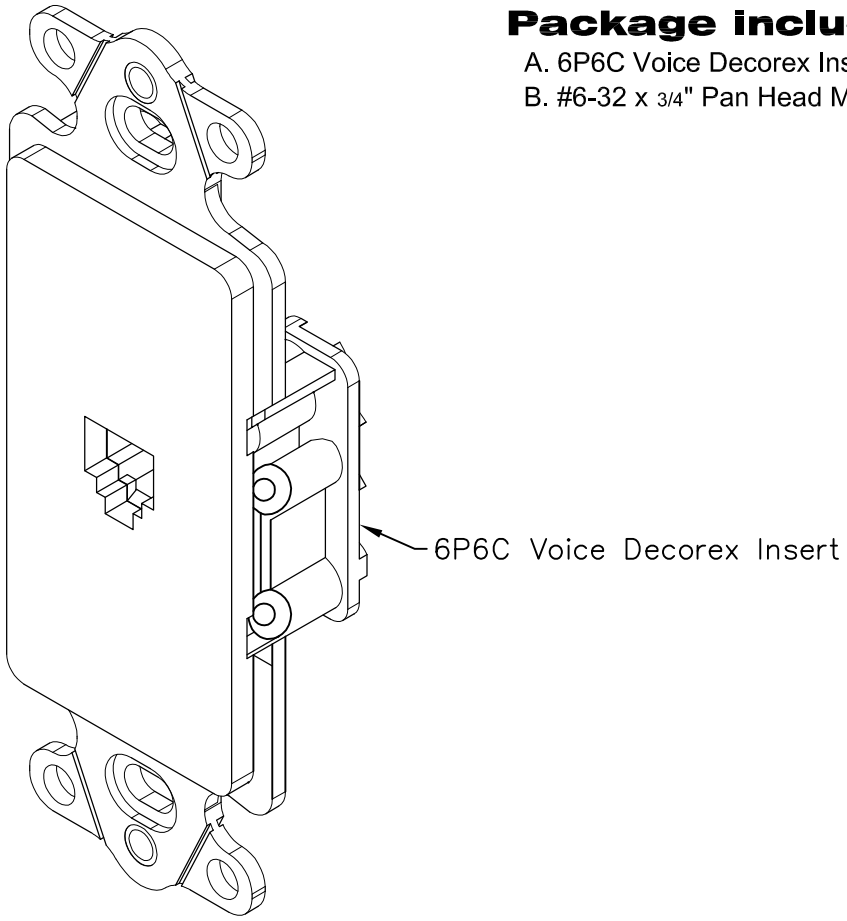

Package includes:

A. 6P6C Voice Decorex Insert, 1 pc
B. #6-32 x 3/4" Pan Head Machine Screw, 2 pcs

Features and Benefits:

- Designed for all voice connectivity applications
- Designed to support a multitude of high tech communication needs with contemporary styling for residential or commercial applications
- Provided with traditional screw down terminals on the rear
- Fits standard NEMA electrical boxes
- Designed for a consistent look with standard decorator style faceplates
- Compatible with all IC107 Decorex faceplates
- Used with ICC ICLC4 and ICLC6 line cords
- Available in almond, ivory, and white
- ANSI/TIA-568-C and UL 1863 compliant

INSERT, DECOREX, VOICE 6P6C			
ITEM NO.	IC630DI6XX	REV. B	
DWG NO.	PS630DI600	PAGE NO. 1	

Premium Products
Proven Performance
Competitive Prices

CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 2100 E. Valencia Dr, Suite D, Fullerton, CA 92831 * www.icc.com

© 2005 ICC. THIS DOCUMENT AND THE DESIGNS, SPECIFICATIONS AND INFORMATION CONTAINED HEREIN ARE THE PROPERTY OF ICC. REPRODUCTION, MODIFICATION, ALTERATION, OR UNAUTHORIZED USE WITHOUT ICC'S APPROVAL IS STRICTLY PROHIBITED. ICC AND THE ICC LOGO ARE THE TRADENAME AND REGISTERED TRADEMARK OF ICC. ALL RIGHTS RESERVED.

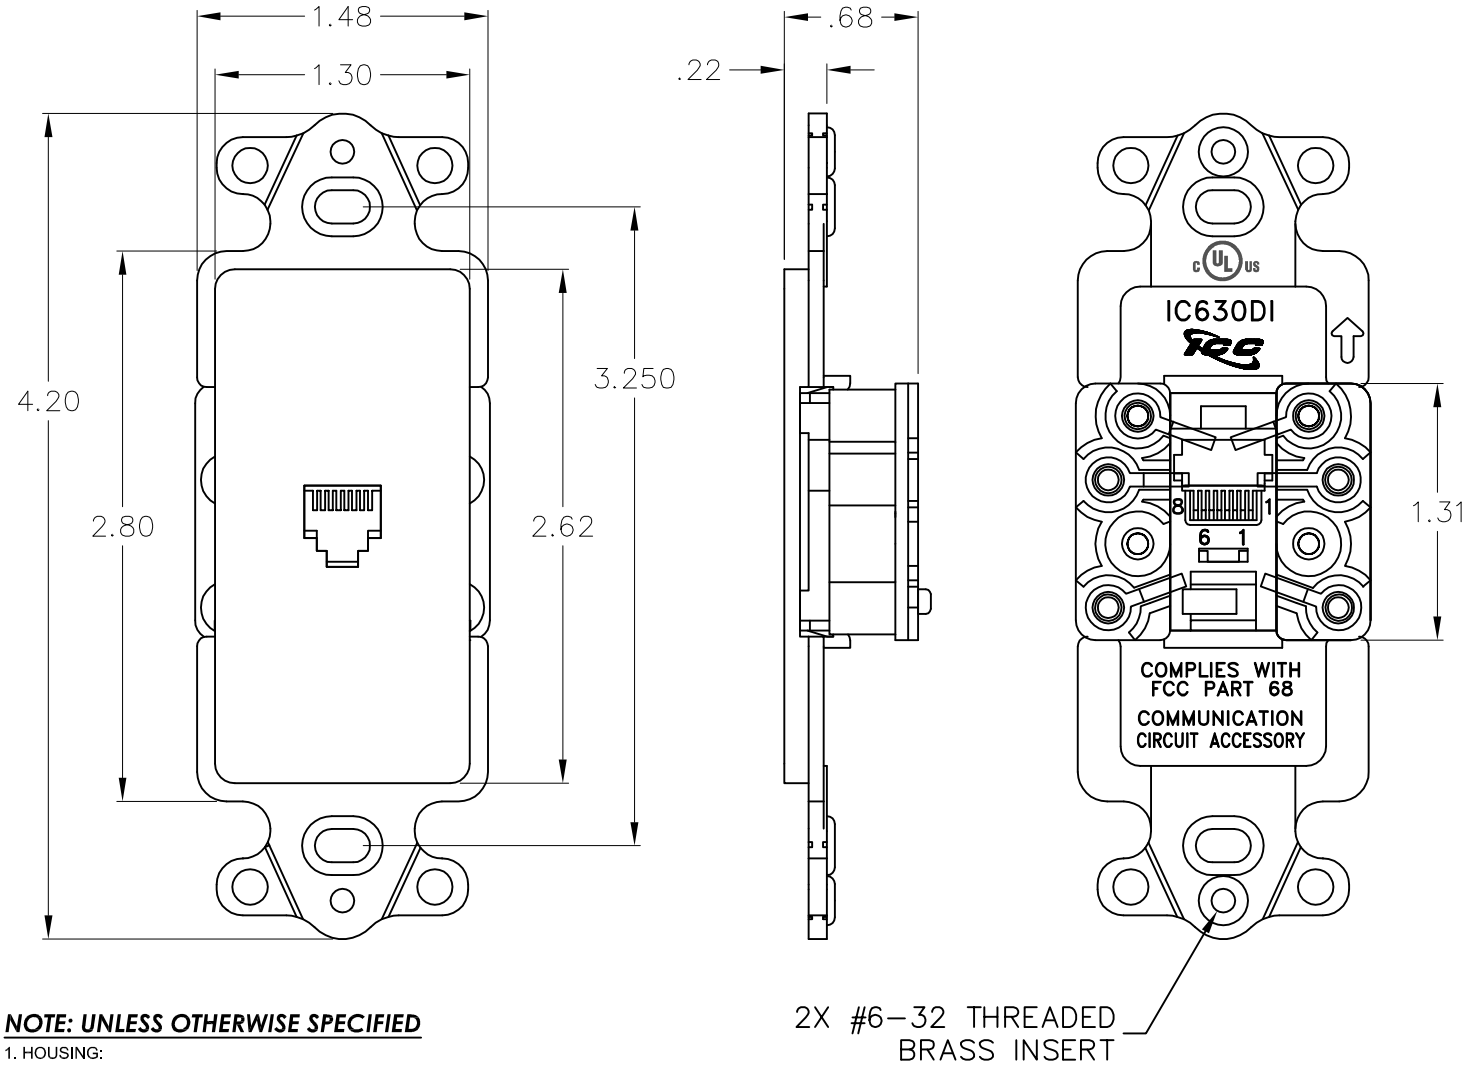

NOTE: UNLESS OTHERWISE SPECIFIED

1. HOUSING:
   - A. MATERIAL: ABS, UL 94V-0
   - B. FINISH: GLOSSY
   - C. COLOR: XX: AL-ALMOND, IV-IVORY, & WH-WHITE
2. WIRING BLOCK:
   - A. MATERIAL & FINISH:
     - -HOUSING: ABS, UL 94V-0
     - -SPRING WIRE CONTACTS: PHOSPHOR BRONZE GOLD PLATING OVER 100 MICRO INCH NICKEL
     - -GOLD PLATING: 1.27 MICRON/50 MICRO INCH MIN
     - -WIRE LEADS: 26 AWG STRANDED WIRE
     - -TERMINATION SCREWS: #6-20 X .415 FLAT PAN HEAD TAPPING SCREWS WITH TWO WASHERS
       15 LBS/INCH MIN TORQUE
       ZINC CHROMATIC PLATED STEEL
     - -TERMINATION LUGS: BRASS
   - B. ELECTRICAL:
     - -CURRENT RATING: 1.5 AMP MAX
     - -DIELECTRIC WITHSTANDING VOLTAGE: 1,000 VOLTS RMS, 60 Hz
     - -CONTACT RESISTANCE: < 20 MILLIOHMS
     - -INSULATION RESISTANCE: > 10 MEGAOHMS
     - -PERFORMANCE: RETURN LOSS OF -20 dB MAX
       FREQUENCY RANGE DC -1.5 GHz
   - C. MECHANICAL:
     - -TOTAL MATING FORCE: 500 GRAMS FOR 6 WIRES LEAD
     - -RETENTION: 17 LBS BETWEEN JACK AND PLUG
     - -CRIMP TENSILE STRENGTH: 4.0-500 LBS

REAR VIEW

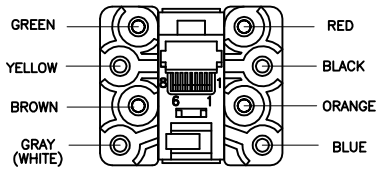

WIRING DIAGRAM

JACK POSITION	WIRE COLOR 6 COND.
1	WHITE
2	BLACK
3	RED
4	GREEN
5	YELLOW
6	BLUE

c UL us FILE NO. 125268

INSERT, DECOREX, VOICE 6P6C			
ITEM NO.	IC630DI6XX	REV. B	
DWG NO.	PS630DI600	PAGE NO. 2	

ICC Premium Products Proven Performance Competitive Prices

CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 2100 E. Valencia Dr, Suite D, Fullerton, CA 92831 * www.icc.com

© 2005 ICC. THIS DOCUMENT AND THE DESIGNS, SPECIFICATIONS AND INFORMATION CONTAINED HEREIN ARE THE PROPERTY OF ICC. REPRODUCTION, MODIFICATION, ALTERATION, OR UNAUTHORIZED USE WITHOUT ICC'S APPROVAL IS STRICTLY PROHIBITED. ICC AND THE ICC LOGO ARE THE TRADENAME AND REGISTERED TRADEMARK OF ICC. ALL RIGHTS RESERVED.